

Guide on Applying and Removing Floor Marking Tape

For Existing Demarcation

If the new tape is going to be installed on an existing demarcation area, the existing tape or paint will need to be removed before application.

- Remove existing paint/tape
- Scruff area and sweep up loose debris
- (If the area was painted) A coat of primer may need to be applied to ensure better adhesion from the tape

Surface Preparation



- Clean the floor with cleaner or denaturated alcohol
- Wipe floor using your standard floor cleaning method
- Allow sufficient time for wet floors to dry

Application



STEP 1

Fold back about 2" of the liner from the tape.

STEP 2

Tack tape at the start point, be careful to align it in the direction desired.

Lim Kim Hai Electric Co (S) Pte Ltd

Lim Kim Hai Building, 53 Kallang Place, Singapore 339177
Tel: (+65) 6292 3711 / 6490 5000 | Fax: (+65) 6297 0078

Email: customerservice@limkimhai.com.sg | Website: www.limkimhai.com.sg



STEP 3


Keep the liner in place. Pull the tape until it is stretched along with desired path.



STEP 4

Remove backing from the tape and apply pressure evenly (preferable with a roller).

Removal

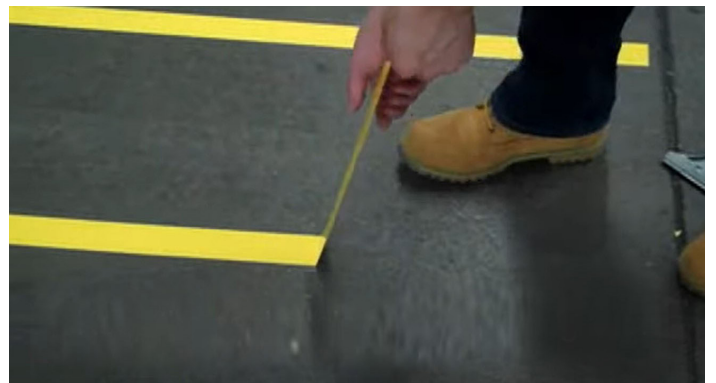

- Using a small amount of force peel at a slow peel rate
- Keep the angle close to 90 degrees

Lim Kim Hai Electric Co (S) Pte Ltd

Lim Kim Hai Building, 53 Kallang Place, Singapore 339177
Tel: (+65) 6292 3711 / 6490 5000 | Fax: (+65) 6297 0078
Email: customerservice@limkimhai.com.sg | Website: www.limkimhai.com.sg