



E·A·R™

Hearing Protection

3M™ E-A-R™ Flexible Fit HA Earplug

Introducing the 3M™ E-A-R™ Flexible Fit HA Earplug

The first earplug with a one-hand insertion NRR claim.


Breakthrough innovations in hearing protection don't happen every day. That's why we're excited to introduce the 3M™ E-A-R™ Flexible Fit Earplug.

It's the first earplug that offers NRR 25 dB (CSA Class AL) using a one-hand insertion, or NRR 30 dB (CSA Class AL) with a two-handed insertion.*



Reinventing the Push-To-Fit category.

The 3M™ E-A-R™ Flexible Fit Earplug has a soft foam tip and a flexible foam-covered fitting stem that allows easy insertion into the ear canal using one or two hands.

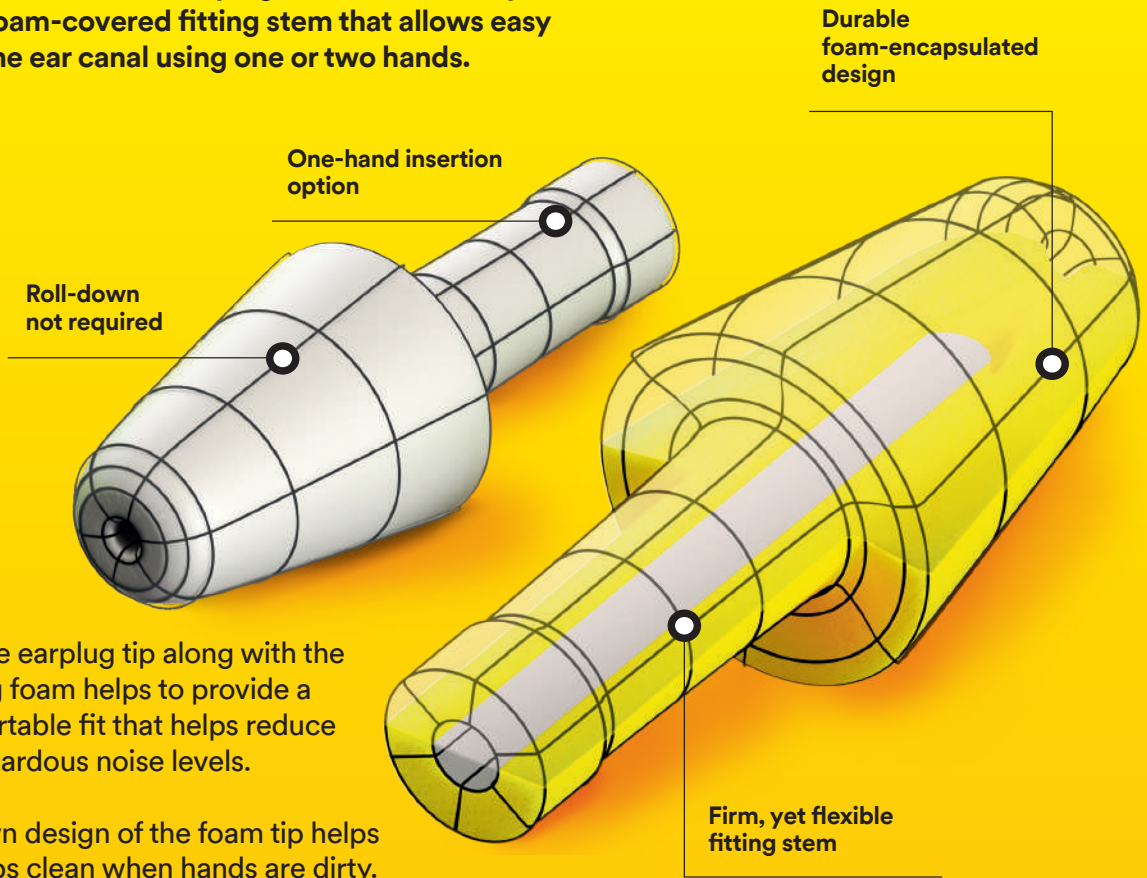

The shape of the earplug tip along with the soft conforming foam helps to provide a snug yet comfortable fit that helps reduce exposure to hazardous noise levels.

The no roll-down design of the foam tip helps keep earplug tips clean when hands are dirty.

3M™ E-A-R™ Flexible Fit Earplugs are fit-testable with the 3M™ E-A-Rfit™ Dual-Ear Validation System.*

Product I.D.	3M I.D.	Description	
328-1000	7100212745	3M™ E-A-R™ Flexible Fit Earplug HA 328-1000, uncorded, polybag, 400 pair per case, *NRR 25/30 dB, CSA Class AL	
328-1001	7100212746	3M™ E-A-R™ Flexible Fit Earplug HA 328-1001, corded, polybag, 400 pair per case, *NRR 25/30 dB, CSA Class AL	
393-2026-50	7100216953	3M™ E-A-R™ Flexible Fit Probed Test Plugs, 393-2026-50, 50 pair per case	



3M Singapore
Personal Safety Division

10 Ang Mo Kio Street 65, Techpoint,
#01-01, Singapore 569059
Phone 6450 8888
Web 3m.com.sg

Always read and follow User Instructions.

3M and E-A-R are trademarks of 3M.
© 2020, 3M. All rights reserved.



Lim Kim Hai Electric Co (S) Pte Ltd
Lim Kim Hai Building,
53 Kallang Place, Singapore 339177
T (+65) 6292 3711 • (+65) 6490 5000
F (+65) 6297 0078
E customerservice@limkimhai.com.sg
W www.limkimhai.com.sg

*3M strongly recommends fit testing of hearing protectors. Research suggests that many users will receive less noise reduction than indicated by the NRR due to variation in hearing protector fit, fitting skill and motivation of the user. If the NRR is used, 3M recommends that it be reduced by 50% or in accordance with applicable regulations.

Noise Reduction Rating (NRR) 25 dB for one-hand insertion and 30 dB for two-hand insertion.